



Smarter Water Management





MAGNETIC FLOAT SENSOR VERTICAL - (MGTP-45MM)



Electrical Characteristics

Contact Form	Single Switch MGTP2-NO (Normally Open) MGTP2-NC (Normally Close)
Contact Rating, Max,	10W
Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 ⁶ Vertical Switching Cycles
Installation	Vertical
Wire Length	1.5 Meters
Customization	Available on Demand

Material

Housing	Delrin
Float	PP Foam
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Rs.90/(1 mtr) Rs.99/(2 mtr) Per Piece (Min. Qty - 100Pieces)



9698816688





MAGNETIC FLOAT SENSOR WITH ¾" PIPE CLIP (MGPM)



Electrical Characteristics

Contact Form	Single Switch MGPM1-NO (Normally Open) MGPM1-NC (Normally Close)
Contact Rating, Max,	10W
Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 ⁶ Vertical Switching Cycles
Installation	Vertical
Wire Length	1.5 Meters
Customization	Available on Demand

Material

Housing	Delrin
Float	PP Foam
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Rs.95/(1 mtr) Rs.99/(2 mtr) Per Piece (Min. Qty - 100Pieces)



9698816688





MAGNETIC FLOAT SENSOR HORIZONTAL(MGSM)



Electrical Characteristics

Contact Form	Single Switch MGSM NO (Normally Open) - As per fixing NC (Normally Close) - As per fixing
Contact Rating, Max,	10W
Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 ⁶ Vertical Switching Cycles
Installation	Vertical
Wire Length	1.5 Meters
Customization	Available on Demand

Material

Housing	Delrin
Float	PP Foam
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Rs.95/(1 mtr) Rs.105/(2 mtr) Per Piece (Min. Qty - 100Pieces)



9698816688





MAGNETIC FLOAT SENSOR REVERSIBLE (MGTP-REV)



Electrical Characteristics

Contact Form	Single Switch (REVERSIBLE) MGTP-REV (NO,NC Possible by Reverse a Ring)
Contact Rating, Max,	10W
Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 ⁶ Vertical Switching Cycles
Installation	Vertical
Wire Length	1.5 Meters
Customization	Available on Demand

Material

Housing	Delrin
Float	PP Foam
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Rs.95/(1 mtr) Rs.99/(2 mtr) Per Piece (Min. Qty - 100Pieces)



9698816688





MAGNETIC FLOAT SENSOR VERTICAL (MGTP3-80MM)



Electrical Characteristics

Contact Form	Single Switch MGTP3-80MM-NO (Normally Open) MGTP3-80MM-NC (Normally Close)
Contact Rating, Max,	10W
Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 ⁶ Vertical Switching Cycles
Installation	Vertical
Wire Length	1.5 Meters
Customization	Available on Demand

Material

Housing	Delrin
Float	PP Foam
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Rs.93/(1 mtr) Rs.103/(2 mtr) Per Piece (Min. Qty - 100Pieces)



9698816688





MAGNETIC FLOAT SENSOR VERTICAL (MGTP4-100MM)



Electrical Characteristics

Contact Form	Single Switch MGTP4-100MM-NO (Normally Open) MGTP4-100MM-NC (Normally Close)
Contact Rating, Max,	10W
Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 ⁶ Vertical Switching Cycles
Installation	Vertical
Wire Length	1.5 Meters
Customization	Available on Demand

Material

Housing	Delrin
Float	PP Foam
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Rs.96/(1 mtr) Rs.106/(2 mtr) Per Piece (Min. Qty - 100Pieces)



9698816688





MAGNETIC FLOAT SENSOR REVERSIBLE (MGPM-REV-3/4" PIPE CLIP)



Electrical Characteristics

Contact Form	Single Switch (REVERSIBLE) MGTPM-REV (NO,NC Possible by Reverse a Ring)
Contact Rating, Max,	10W
Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 ⁶ Vertical Switching Cycles
Installation	Vertical
Wire Length	1.5 Meters
Customization	Available on Demand

Material

Housing	Delrin
Float	PP Foam
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Rs.95/(1 mtr) Rs.98/(2 mtr) Per Piece (Min. Qty - 100Pieces)



9698816688





MAGNETIC FLOAT SENSOR VERTICAL (EE116DS)



Electrical Characteristics

Contact Form	Double Switch EE116DS
	A side (Normally Open) & B side (Normally Close) with Double Switch
Contact Rating, Max,	10W
Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 ⁶ Vertical Switching Cycles
Installation	Vertical
Wire Length	1.5 Meters
Customization	Available on Demand

Material

Housing	Delrin
Float	PP Foam
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Rs.150 Per Piece (Min. Qty - 100Pieces)



9698816688



www.blueredautomaticwaterlevelcontroller.com



MAGNETIC FLOAT SENSOR VERTICAL (EESMV)

Electrical Characteristics

Contact Form	Single Switch
	EESMV - NO (Normally Open)
	EESMV - NC (Normally Close)
Contact Rating, Max,	10W
Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 ⁶ Vertical Switching Cycles
Installation	Vertical
Wire Length	1.5 Meters
Customization	Available on Demand

Material

Housing	Delrin
Float	PP Foam
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Rs.98 Per Piece (Min. Qty - 100Pieces)




9698816688



www.blueredautomaticwaterlevelcontroller.com



DC SWITCH FOR RO PURIFIERS (EEDCS-RO-37MM)

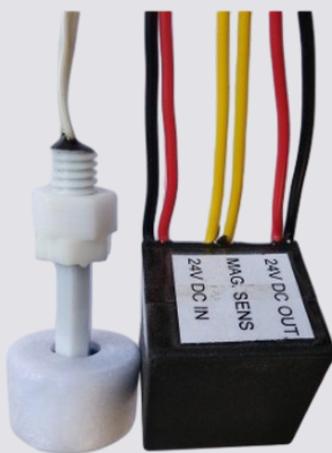

Electrical Characteristics

Dc Switch	·Input Voltage Rating : 24V DC ·output Voltage Rating : 24V DC ·Current Carrying : 2.5 Amp DC ·Max Wire length: 10 inch
Contact Form	Single Switch Water Level Sensor-NC (Normally Close)
Contact Rating, Max,	10W
Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 6 Vertical Switching Cycles
Installation	Vertical
Wire Length	1.5 Meters
Customization	Available on Demand

Material

Housing	Delrin
Float	PP Foam
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Rs.160 Per Piece (Min. Qty - 100Pieces)



9698816688





AC SWITCH FOR WATER COOLER/DISPENSOR (EEACS-RO-116MM)



Electrical Characteristics

EEACS-RO	
Automatic Water Level On/Off Switch	<ul style="list-style-type: none">Input Voltage Rating : 230V ACOutput Voltage Rating : 230V ACCurrent Carrying : 4 Amp DCMax Wire length : 1.5mtr
Contact Form	Double Switch EEFS-116MM3W A side (Normally Open) & B side (Normally Close) with Double Switch
Contact Rating, Max,	10W
Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 ⁶ Vertical Switching Cycles
Installation	Vertical
Wire Length	1.5 Meters
Customization	Available on Demand

Material

Housing	Delrin
Float	PP Foam
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Rs.450 Per Piece (Min. Qty - 100Pieces)



9698816688





MAGNETIC FLOAT SENSOR VERTICAL STAINLESS STEEL (EEVER46SS)



Electrical Characteristics

Contact Form	Single Switch EEVER46SS - NO (Normally Open) EEVER46SS - NC (Normally Close)
Contact Rating, Max,	10W
Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 ⁶ Vertical Switching Cycles
Installation	Vertical
Wire Length	1.5 Meters
Customization	Available on Demand

Material

Housing	Delrin
Float	PP Foam
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Rs.450 Per Piece (Min. Qty - 100Pieces)



9698816688





MAGNETIC FLOAT SENSOR HORIZONTAL STAINLESS STEEL (MGHOR70SS)



Electrical Characteristics

Contact Form

Single Switch
MGHOR70SS (NO or NC)

Contact Rating, Max,	10W
Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 ⁶ Vertical Switching Cycles
Installation	Vertical
Wire Length	1.5 Meters
Customization	Available on Demand

Material

Housing	Delrin
Float	PP Foam
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Rs.650 Per Piece (Min. Qty - 100Pieces)



9698816688





GAS GEYSER INLINE SENSOR (PRESSURE SENSOR) (Eegas)



Electrical Characteristics

Contact Form

Single Switch
NO (Normally Open)

Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 ⁶ Vertical Switching Cycles
Installation	Vertical
Wire Length	1.5 Meters
Customization	Available on Demand

Material

Housing	Delrin
Float	PP Foam
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Rs.50 Per Piece (Min. Qty - 100Pieces)



9698816688





MAGNETIC DOOR SENSOR (EEDR1)



Electrical Characteristics

Contact Form	Single Switch NO (Normally Open) A Side NC (Normally Close) B Side
Contact Rating, Max,	10W
Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 ⁶ Vertical Switching Cycles
Wire Length	12 inch

Material

Housing	Delrin
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Type NO Rs.90/- Type NC Rs.180/- Per Piece (Min. Qty - 50 Pieces)




9698816688





MAGNETIC DOOR SENSOR (EEDR2)

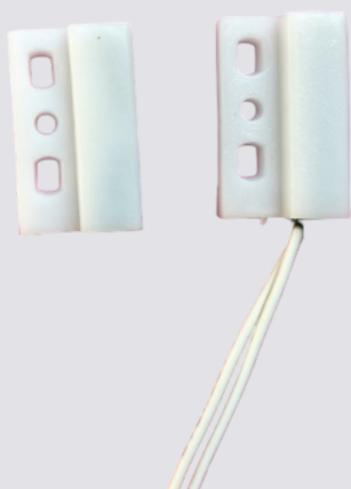

Electrical Characteristics

Contact Form	Single Switch NO (Normally Open) A Side NC (Normally Close) B Side
Contact Rating, Max,	10W
Switching Voltage, Max	100 VDC
Switching Current, Max	0.5 Amp DC
Ideal Operational Rating	10 VDC and <50m Amp DC
Life expectancy, Min	0.5x10 ⁶ Vertical Switching Cycles
Wire Length	12 inch

Material

Housing	Delrin
Potting	PU/ Epoxy

Basic Price (Exclusive of GST 18%)

Type NO Rs.80/- Type NC Rs.180/- Per Piece (Min. Qty - 50 Pieces)



9698816688





CONTACT TYPE SINGLE PIN SENSORS (EESP)



Electrical Characteristics

Contact Form	Single Switch Single Pin Contact Sensor
Mounting Type	Immersible/Hanging in tank
Switching Voltage, MaxType	Suitable for low-voltage control signal(5v-12v DC)
Colour Options	Red,Green,blue,Yellow,Black
Temperature Range	0 Deg to 80 Deg
Wire length	1.5mtr

Material

Housing	Polypropylene (Molded)
Pin	SS-316

Basic Price (Exclusive of GST 18%)

Rs.28/- Per Piece (Min. Qty.-100 Pieces)



9698816688





CONTACT TYPE DOUBLE PIN SENSORS (EEDP) (INLINE FLOW SENSOR)



Electrical Characteristics

Contact Form	Single Switch DOUBLE Pin Contact Sensor
Mounting Type	Immersible/Hanging in tank
Switching Voltage, MaxType	Suitable for low-voltage control signal(5v-12v DC)
Colour Options	Red,Green,blue,Yellow,Black
Thread	1/2" BSP
Wire length	1 mtr

Material

Housing	Polypropylene (Molded)
Pin	SS-316

Basic Price (Exclusive of GST 18%)

Rs.42/- Per Piece (Min. Qty.-100 Pieces)



9698816688





CARBON TYPE SINGLE PIN SENSORS (CARBON) WITH TRANSPARENT CASING



Electrical Characteristics

Contact Form	Single Switch Single Pin Contact Sensor
Mounting Type	Immersible / Hanging in tank/Pendulam
Switching Voltage, MaxType	Suitable for low-voltage control signal(5v-12v DC)
Colour Options	Red,Green,blue,Yellow,Black
Temperature Range	0 Deg to 80 Deg
Wire length	1.5 mtr

Material

Housing	Polypropylene (Molded)
Pin	Carbon

Basic Price (Exclusive of GST 18%)

Rs.28/- Per Piece (Min. Qty.-100 Pieces)



9698816688





CONTACT TYPE SINGLE PIN SENSORS WITH TRANSPARENT CASING



Electrical Characteristics

Contact Form	Single Switch Single Pin Contact Sensor
Mounting Type	Immersible/ Hanging in Tank /Pendulam
Switching Voltage,Max	Suitable for low-voltage control signal(5v-12v DC)
Colour Options	Red, Green, Blue, Yellow, Black
Temperature Range	0 Deg to 80 Deg
Wire Length	1.5 Mtr

Material

Housing	Polypropylene Transparent Casing
Pin	SS-316

Basic Price (Exclusive of GST 18%)

Rs.28/- Per Piece (Min. Qty.- 100 Pieces)



9698816688





CABLE TYPE FLOAT SWITCH (FT2M)



Electrical Characteristics

Contact Form	Single Switch Mechanical Switching COM-Red,NO-Black,NC-Blue
Outout Type	SPDT(1NO,1NC)
Switching Voltage, Max	220-240v
Limit Switching Current, Max	10Amps at 240V
Differential Switching Angle	45 Deg
Operating Temperture Max.	60 Deg
Rated no.of Operations	50000
Installation	Vertical/Hangingion
Wire length	2 meters
IP Rating	IP67

Material

Housing	ABS
WIRE	1.5SQ MM
WEIGHT in gm	662gm

Basic Price (Exclusive of GST 18%)

Rs.450/- Per Piece (Min. Qty.-50 Pieces)



9698816688



BLUERED SOLUTIONS

2nd Floor, Burhani Complex, No:101, Kaleeswara Mill Rd,
Anupperpalayam, Ram Nagar, Coimbatore - 641009



+91 - 96988 - 16688



blueredsolutions@gmail.com



Smart Sensors for Water Management